

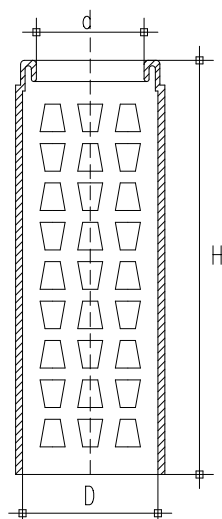


## Perforated Tubes

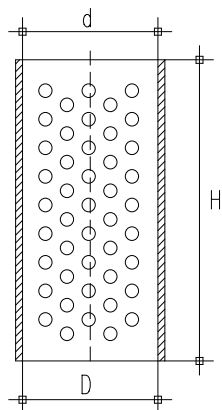

Code	Article's name	H mm	D mm	d mm	Weight gr
1046PC2	WINDOWED CYL. H165 REINFORCED PC2	165,0	59,0	54,0	130,0
1047FV3	DYE TUBE H161 REINFORCED FV3	161,0	59,0	54,0	100,0
1048FV3	WINDOWED CYL. H170 REINFORCED FV3	170,0	59,0	54,0	105,0
1048PC2	WINDOWED CYL. H170 REINFORCED PC2	170,0	59,0	54,0	125,0
1049FV3	dyeing tube H178 d.54 D.59 in PPFV30	178,0	59,4	54,4	112,0
1052CI	DYE TUBE H/288 D.69 PLAIN	290,0	69,2	58,0	155,0
1052T2V1	DYE TUBE H/288 D.69 PLAIN IN T2V1	293,0	69,4	58,6	205,0
1053CI	DYE TUBE H/288 D.69 INT.SYS.	288,0	69,0	57,6	125,0
1054CI	DYE TUBE H/288 INT.SYS. F528	288,0	69,2	58,0	104,0
1055CIA	DYE TUBE H/230 D.69 INT.SYS. A53	230,0	69,0	52,6	92,0
1055CIB	DYE TUBE H/230 D.69 INT.SYS. 58	230,0	69,0	58,0	92,0
1056CI	DYE TUBE H/228 D.56 INT.SYS.	228,0	56,0	45,0	65,0
1056HCI	DYE TUBE H/230 D.56 INT.SYS.	230,0	56,2	45,0	65,0
1057CI	DYE TUBE H/197 D.45 INT.SYS.	197,0	45,0	36,0	44,0
1057SI	DYE TUBE H/197 D.45 STD.	197,0	44,5	44,5	44,0
1058CI	DYE TUBE H/228 D.56 REINFORCED	228,0	56,2	45,0	95,0
1058CIT2V1	DYE TUBE H/228 D.56 REINFORCED T2V1	230,0	56,0	44,5	115,0
1060CI	DYE TUBE H/170 D.56 INT.SYS.	170,0	56,0	45,0	44,0
1060SI	DYE TUBE H/170 D.56 STD	170,0	56,0	56,0	43,0
1061CI	DYE TUBE H/197 D.56 INT.SYS.	197,0	56,0	45,0	60,0
1061SI	DYE TUBE H/197 D.56 STD.	197,0	56,0	56,0	58,0
1062SI	CYL. H172 D.63 REINFORCED FV40	172,0	63,5	63,5	150,0
1066CI	DYE TUBE H/226 D.56 INT.SYS	226,0	56,0	45,0	62,0
1082CI	WINDOWED H/230 D.56 INT.SYS.	230,0	56,0	45,0	68,0
1082SI	WINDOWED H/230 D.56 STD	230,0	56,0	56,0	68,0
1083CI	DYE TUBE H/230 D.56 TRAP.INT.	230,0	56,2	44,5	66,0
1083SI	DYE TUBE H/230 D.56 TR.HOLE	230,0	56,0	56,0	65,0
1083T2V1	DYE TUBE H/233 D.56 TR.HOLE T2V1	232,5	56,2	56,4	82,0
1086CTB	CYL. H/170 D.54 WITH NOTCH B	170,0	54,0	54,0	65,0
1086STB	CYL. HAMEL H/170 D.54 STD. B	170,0	54,0	54,0	65,0
1087CI	RETRAFLEX H/228 D.56	228,0	56,0	44,5	58,0
1088CI	RETRAFLEX H/228 D.56 WITH NOTCH	228,0	56,0	44,5	58,0
1089CI	RETRAFLEX H/228 D.56 looking 11,6 mm	228,0	56,0	44,5	58,0
1092CI	RETRAFLEX H/288 D.69	288,0	69,0	57,8	115,0
1092WR	RETRAFLEX WITH RING H/288 D.69	288,0	69,0	57,8	115,0
1093CI	DYE TUBE H/230 D.69 INT.SYS. F396	230,0	69,0	57,6	84,0
1097AF	COMPRESSIBLE DYE TUBE H/288 D.69 WITH FILTER	288,0	69,2	57,8	105,0
1097B	COMPRESSIBLE DYE TUBE H/288 D.69	288,0	69,2	57,8	105,0

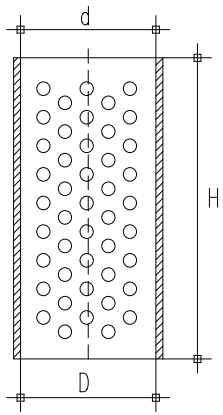

<b>Code</b>	<b>Article's name</b>	<b>H mm</b>	<b>D mm</b>	<b>d mm</b>	<b>Weight gr</b>
<b>1098CI</b>	COMPRESSIBLE DYE TUBE H/230 D.61 d.56	230,0	61,0	56,0	45,0
<b>2010</b>	QUADRIFLEX DYE TUBE H/288 D.69	287,0	69,2	57,3	115,0
<b>2014</b>	QUADRIFLEX DYE TOP FLEX H/288 D.69	287,0	69,2	57,3	105,0
<b>92021</b>	DYE CONE 4°20' H/170	170,0	59,0	33,0	37,0

